



iMac G4 15" 700 MHz EMC 1873 AirPort Card Replacement

Replacing or upgrading the AirPort Card in your iMac G4.

Written By: Lilly



INTRODUCTION



This step will help you connect to wireless internet and get you back to surfing the internet faster than before. You can add a AirPort to your computer even if it did not originally come with one.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Outer Base Plate

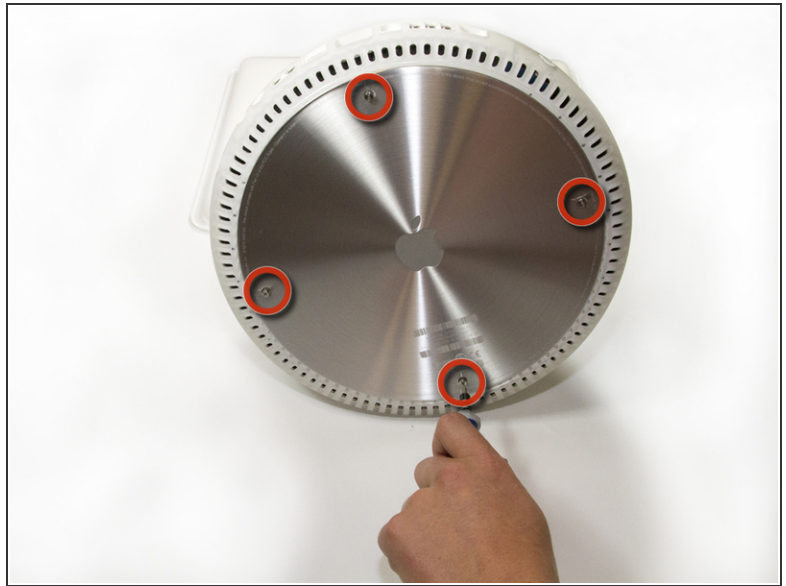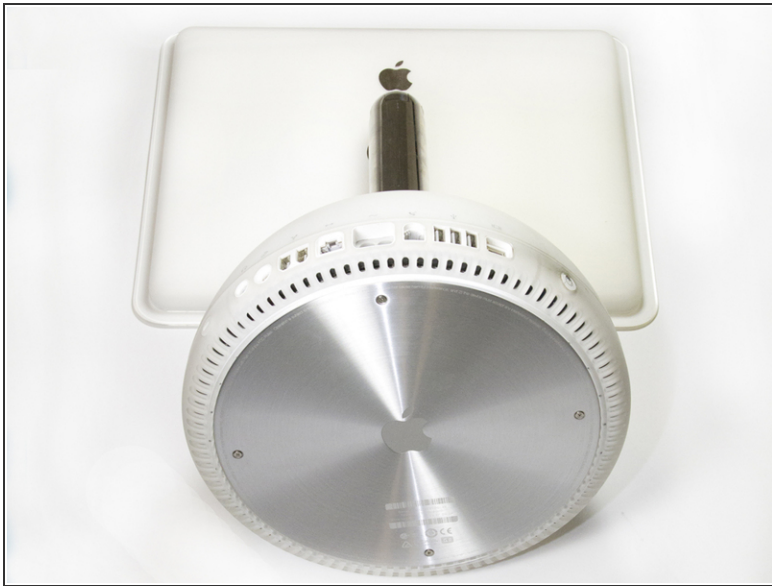


- ❗ Place the computer monitor face down on a safe, harmless surface.
- Using a Phillips #00 screw driver, remove the four 6.86 mm screws from the metal plate.

Step 2



- Remove the metal plate from bottom of the iMac G4.
- ❗ The four screws do not completely separate from the metal plate.

Step 3 — AirPort Card

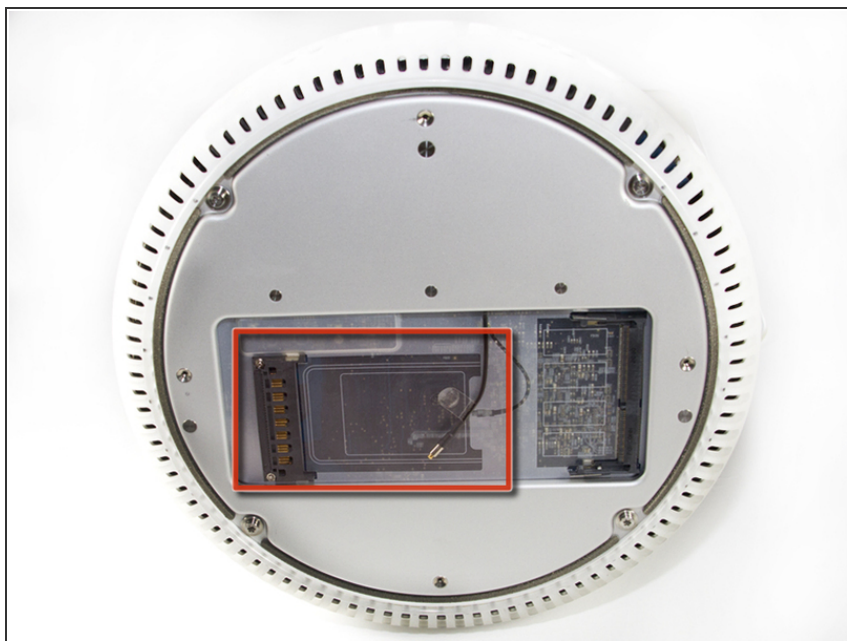

- Use a spudger to lift and remove the AirPort's antenna connector.
- ⓘ This step is only applicable to iMacs that came with an AirPort card installed.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-20 03:57:09 AM.